

ADJUSTABLE FREQUENCY AC DRIVES

NFX9000 Series



- **V/Hz Control:** Provides 150% Starting Torque and Advanced Low Speed Control
- **Easy to Understand Keypad**
- **RS485 Serial Communication Port**
- **Single-Phase or 3-Phase Input Capability on 115/240 Vac Rated Units**

Cutler-Hammer® NFX9000 adjustable frequency AC Drives from Eaton's electrical business are designed to provide adjustable speed control of 3-phase motors. These microprocessor-based drives have standard features that can be programmed to tailor the drive's performance to suit a wide variety of application requirements. The NFX9000 volts-per-hertz product line utilizes a 32-bit microprocessor and insulated gate bipolar transistor (IGBTs) which provides quiet motor operation, high motor efficiency and smooth low speed performance. The size and simplicity of the NFX9000 make it ideal for hassle-free installation where size is a primary concern.

Models rated at 240V, single- or 3-phase, 50/60 Hz are available in sizes ranging from ¼ to 2 hp. Models rated at 115V, single-phase, 50/60 Hz are available in the ¼ to ½ hp size range. The standard drive includes a digital display as well as operating and programming keys on a removable keypad. The display provides drive monitoring and diagnostic information. The keys are utilized for digital adjustment and programming of the drive plus operator control. Separate terminal blocks for control and power wiring are provided for customer connections. The drives feature RS485 serial communications.



NFX50A0-1 shown smaller than actual size.

SPECIFICATIONS

OUTPUT RATINGS

Horsepower: 90 to 132V, ¼ to ½ hp, 200 to 240V, ½ to 2 hp

Frequency Range: 0.1 to 400 Hz

Overload Rating: 150% for 60 sec

Frequency Resolution: Digital, 0.1 Hz

Frequency Accuracy:

Digital: ± 0.01% of maximum frequency

Analog: ± 0.2% of maximum frequency

Undervoltage Carryover Limit: 0.3 to 25 sec

MOTOR PERFORMANCE

Motor Control: V/Hz

Constant Torque: Standard

Speed Regulation: 0.5% of base speed

INPUT POWER

Voltage: 50/60 Hz, ±3 Hz

100 to 120V: -10% +10%/1-phase

200 to 240V: -10% +5%/1-phase

200 to 240V: -10% +5%/3-phase

Displacement Power Factor:

Better than 0.95

Efficiency: Typically greater than 95%

DESIGN TYPE

Microprocessor: 32-bit

Converter Type: Diode

Inverter Type: Insulated Gate Bipolar Transistor


Waveform: PWM V/Hz

ENVIRONMENT

Operating Temperature: -10 to 40°C (14 to 104°F)

Humidity: 20 to 90% non-condensing

Maximum Elevation: 1000 m (3281')

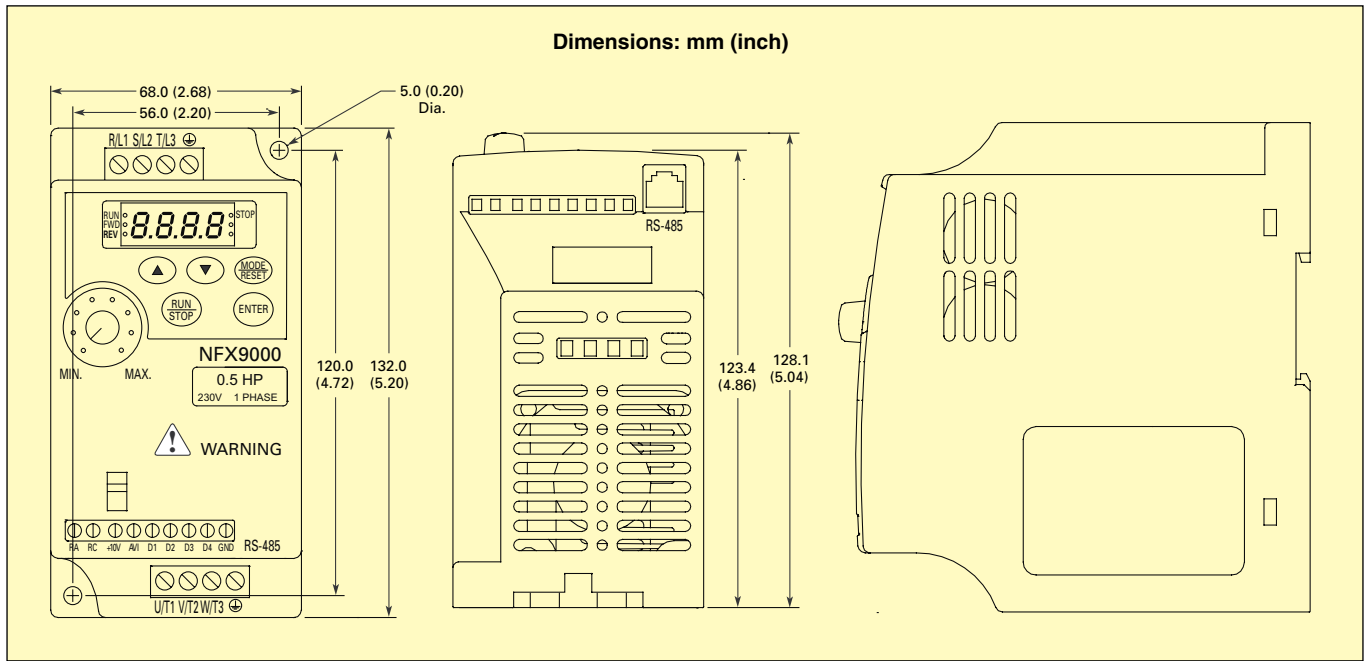

CODES AND STANDARDS

NEMA, IEEE, NEC: Design standards, UL listed, cUL listed, CE marked
Standard Enclosure: Protected chassis (IP20)

PROTECTIVE FEATURES

Ground Fault: Standard
Overload Protection: Standard
Overcurrent: Standard
Overvoltage: Standard
Undervoltage: Standard
Overtemperature: Standard
Overload Limit: Standard

SET UP ADJUSTMENTS, PERFORMANCE FEATURES, OPERATOR CONTROL AND EXTERNAL INTERFACE

Keypad:

Alphanumeric Display: Standard, 1 x 4 character
Digital Indicators: RUN/STOP and FORWARD/REVERSE
Diagnostics: Last 3 trips with cause

LED Status Indicators: 4; RUN/STOP and FORWARD/REVERSE
Operator Functions: RUN/STOP, speed control (digital or potentiometer), RESET, MODE keys and ENTER

I/O TERMINAL BLOCK

Analog Inputs: 1 Input, 0 to 10 Vdc, 4 to 20 mA
Potentiometer: 1 to 2K Ω
Analog Voltage: Nominal 10 Vdc, 10K Ω input impedance
Analog Current: Nominal 4 to 20 mA, 250 Ω
Digital Inputs: 4 programmable inputs
Digital Outputs: 1 form A relay contact

PROGRAMMABLE PARAMETERS

Out of the Box: Factory settings loaded for quick start-up
Acceleration and Deceleration: 2 separately, adjustable linear or S curve times, 0.1 to 600 sec

DC Injection Braking:
External Fault: Terminal input
Jog: Terminal input

Fault Reset: STOP/RESET or terminal input
I/O: NO/NC selectable
Jump Frequencies: 3, with adjustable width
Parameter Security: Programmable software lock
Preset Speeds: 2 preset speeds
Reversing: Keypad or terminal
Speed Setting: Keypad, terminal or pot
RUN/STOP Control: Keypad or terminal
Stop Modes: Decel, coast or DC injection
RELIABILITY
Pretested Components: Standard
Surface Mount Technology: Standard, PCBs
Computerized Testing: Standard
Final Test with Full Load: Standard
Eaton's Cutler-Hammer Engineering Systems and Service: National network of AF drive specialist

To Order Visit omega.com/nfx9000_series for Pricing and Details

MODEL NO.	DESCRIPTION	INPUT AMPERE	AMP RATING
115 VOLT			
NFXF50A0-1	½ hp single phase, watt loss: 20 W	9.0	2.50
230 VOLT			
NFXF25A0-2	Micro drive 0.25 Hp 230 Vac V/Hz (open chassis), watt loss: 20 W	4.9	1.6
NFX001A0-2	Micro drive 1 Hp 230 Vac V/Hz (open chassis), watt loss: 38 W	9.7	4.2
NFX002A0-2	Micro drive 2 Hp 230 Vac V/Hz (open chasis), 3 ph, watt loss: 75 W	9.0	7.0

Comes with operator's manual.
Ordering Example: NFXF50A0-1, ½ Hp single phase, 20 W loss.