

# OMB-DBK90

## 56-Channel Thermocouple Input Module for OMB-DAQSCAN-2000 Series




**\$1749**  
Basic Unit

OMB-DBK90, \$1749, shown smaller than actual size.

5SRTC-TT-K-24-26, \$54, 5 pack basic unit. Visit [omega.com](http://omega.com) for more details.



- ✓ 56 Thermocouple Channels in One Compact and Rugged Enclosure
- ✓ Supports Any Thermocouple Type on Any Channel
- ✓ Very Low Cost per Channel and Very High-Channel Density
- ✓ Attach Up to 16 Units Together for Up to 896 Channels per A/D Mainframe

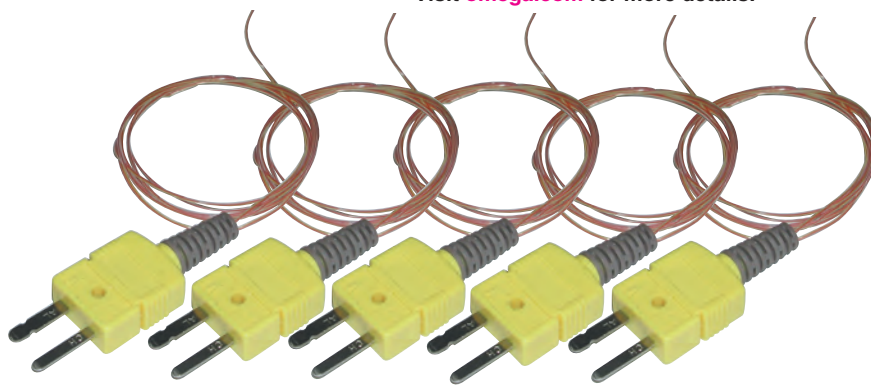

Ready made insulated thermocouples with miniature male connector and heavy duty flex strain relief.

The OMB-DBK90 module provides 56 channels of high-accuracy thermocouple (TC) inputs. The OMB-DBK90 is ideally suited for high-channel-count TC applications, with a maximum TC capacity of 896 channels per system. For larger channel-count applications, multiple mainframes can be combined for a maximum channel capacity of 3584 channels.

Thermocouples attach to the OMB-DBK90 via mini-TC input connectors, and any TC type can be installed into any channel. Each row of 14 TC inputs has a separate cold-junction sensor to ensure accurate readings.

OMB-DBK90 modules are housed in a rugged all-metal package that can be connected to an OMB-DAQSCAN-2000 and rack-mounted with an optional rack-mount kit.

When multiple OMB-DBK90's are mounted together, a male and female P1 connector on either side of the unit provides all system connections so that only a single cable back to the A/D mainframe is required.


For distributed applications, such as throughout the cabin of a vehicle, OMB-DBK90 modules can be mounted as separate units.

Up to 20' of cable can be used to connect OMB-DBK90 modules.

Each OMB-DBK90 has a built-in auto-zero channel and a CJC channel. The OMB-DBK90 can measure one TC channel in 3 ms, 14 TC channels in 16 ms, and all 56 TC channels in 61 ms.

An OMB-DBK90 based system of 896 channels can be measured in 976 ms. This speed is slower than other OMB-DBK modules to ensure that the TC measurements are accurate, low noise, and stable. Typical measurement accuracies are better than 0.7°C, with channel-to-channel variation typically less than 0.5°C.

If OMB-DBK90 measurements are mixed with measurements from other OMB-DBK options, the other measurements can be made at their standard 5 or 10  $\mu$ s/channel rate.

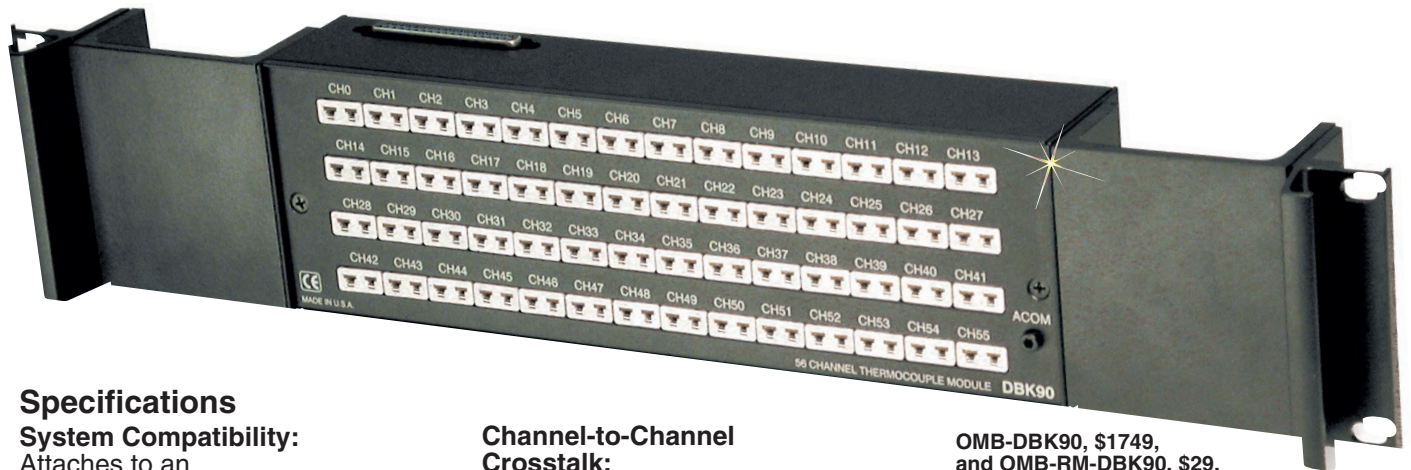

## Specifications

### System Compatibility:

Attaches to an OMB-DAQSCAN-2000

**System Connector:** Male and female DB37 for unit-to-unit mating and mating with P1 on the acquisition mainframe

**TC Connector:** Mini-TC connectors

**ACOM Connector Type:** Pomona model 5936-0

**Inputs:** 56 differential TC inputs, open TC detection per channel

**TC Types:** J, K, T, E, S, R, B, N28, N14

**Speed:** 1 channel in 3 ms, 14 channels in 16 ms, 56 channels in 61 ms

### Dimensions:

285 W x 88 D x 52 mm H (11 x 3.44 x 2.05")

**Weight:** 0.96 kg (2.12 lb)

### Power Requirements:

40 mA max from  $\pm 15$  V;

40 mA max from 5 V;

1400 mW total

**Input Impedance:** 4 M $\Omega$

(differential) in parallel with 400 pF

**Input Bandwidth:** 1 kHz

**Minimum Resolution:**

0.1°C for all TC types

**TC Accuracy:** Valid for one year at 25°C ambient (see table)

**Operating Temperature:**

-30 to 70°C (-22 to 158°F)

**Relative Humidity:** 0 to 95% non-condensing

**Temperature Coefficient of Accuracy for Type T TC:**  $\pm 0.05^\circ\text{C}$

for every  $^\circ\text{C}$  away from 25°C

### Channel-to-Channel Crosstalk:

-90 dB typ (0 to 100 Hz)

**DC CMRR:** -80 dB typ

**AC CMRR:** -80 dB typ (0 to 60 Hz)

**Maximum Common Mode Voltage:**  $\pm 10$  V

**Overvoltage Protection:**  $\pm 40$  V

OMB-DBK90, \$1749, and OMB-RM-DBK90, \$29, rack mount kit, shown smaller than actual size



OMEGACARE<sup>SM</sup> extended warranty program is available for models shown on this page. Ask your sales representative for full details when placing an order. OMEGACARE<sup>SM</sup> covers parts, labor and equivalent loaners.



OMB-DAQSCAN-2005, \$2049, front and back, shown smaller than actual size.

## TC Accuracy at Measurement Temperature in $^\circ\text{C}$ ( $\pm^\circ\text{C}$ )

Type	Min	Max	-100	0	100	300	500	700	900	1100	1400
J	-200	760	0.8	0.7	0.7	0.8	0.9	0.9	-	-	-
K	-200	1200	0.9	0.8	0.8	0.9	1.1	1.1	1.2	1.3	-
T	-200	400	0.9	0.8	0.8	0.8	-	-	-	-	-
E	-270	650	0.8	0.7	0.7	0.7	0.8	-	-	-	-
S	-50	1768	-	3.1	2.4	2.0	2.0	1.9	2.0	2.1	2.1
R	-50	1768	-	3.1	2.1	2.0	1.9	1.9	1.7	1.9	2.0
B	50	1780	-	-	-	4.9	3.2	2.8	2.4	2.3	2.0
N28	-270	400	1.2	0.9	0.9	0.9	-	-	-	-	-
N14	0	1300	-	0.9	0.9	0.9	1.1	1.1	1.2	1.5	-

Accuracy conditions: exclusive of thermocouple errors, exclusive of noise, VCM = 0 25°C ambient temperature, stabilized for 1 hour.

**AVAILABLE FOR FAST DELIVERY!**

## To Order (Specify Model Number)

Model No.	Price	Description
OMB-DBK90	\$1749	56-channel thermocouple input module
OMB-CA-37-1	51	37-pin cable, 0.18 m (7") long, connects OMB-DBK90 to OMB-DAQSCAN
OMB-DAQSCAN-2005	2049	Ethernet system with 16 single-ended/8 differential 250 KHz 16 bit analog inputs, 40 digital I/O, 4 analog outputs, 4 frequency/pulse Counters and 2 frequency/pulse generators
OMB-RM-DBK90	29	Rack mount kit for OMB-DBK90

Each OMB-DBK90 module is supplied with complete operator's manual on CD ROM.

**Ordering Example:** OMB-DBK90 56-channel thermocouple input module and OMEGACARE<sup>SM</sup> 1 year extended warranty for OMB-DBK90 (adds 1 year to standard 1-year warranty) and OMB-CA-37-1 cable, \$1749 + 150 + 51 = \$1950.





#### UNITED STATES

[www.omega.com](http://www.omega.com)  
1-800-TC-OMEGA  
Stamford, CT.

#### CANADA

[www.omega.ca](http://www.omega.ca)  
Laval(Quebec)  
1-800-TC-OMEGA

#### GERMANY

[www.omega.de](http://www.omega.de)  
Deckenpfronn, Germany  
0800-8266342

#### UNITED KINGDOM

[www.omega.co.uk](http://www.omega.co.uk)  
Manchester, England  
0800-488-488

#### FRANCE

[www.omega.fr](http://www.omega.fr)  
Guyancourt, France  
088-466-342

#### CZECH REPUBLIC

[www.omegaeng.cz](http://www.omegaeng.cz)  
Karviná, Czech Republic  
596-311-899

#### BENELUX

[www.omega.nl](http://www.omega.nl)  
Amstelveen, NL  
0800-099-33-44



## More than 100,000 Products Available!

### • Temperature

Calibrators, Connectors, General Test and Measurement Instruments, Glass Bulb Thermometers, Handheld Instruments for Temperature Measurement, Ice Point References, Indicating Labels, Crayons, Cements and Lacquers, Infrared Temperature Measurement Instruments, Recorders Relative Humidity Measurement Instruments, RTD Probes, Elements and Assemblies, Temperature & Process Meters, Timers and Counters, Temperature and Process Controllers and Power Switching Devices, Thermistor Elements, Probes and Assemblies, Thermocouples Thermowells and Head and Well Assemblies, Transmitters, Wire

### • Flow and Level

Air Velocity Indicators, Doppler Flowmeters, Level Measurement, Magnetic Flowmeters, Mass Flowmeters, Pitot Tubes, Pumps, Rotameters, Turbine and Paddle Wheel Flowmeters, Ultrasonic Flowmeters, Valves, Variable Area Flowmeters, Vortex Shedding Flowmeters

### • pH and Conductivity

Conductivity Instrumentation, Dissolved Oxygen Instrumentation, Environmental Instrumentation, pH Electrodes and Instruments, Water and Soil Analysis Instrumentation

### • Data Acquisition

Auto-Dialers and Alarm Monitoring Systems, Communication Products and Converters, Data Acquisition and Analysis Software, Data Loggers Plug-in Cards, Signal Conditioners, USB, RS232, RS485 and Parallel Port Data Acquisition Systems, Wireless Transmitters and Receivers

### • Pressure, Strain and Force

Displacement Transducers, Dynamic Measurement Force Sensors, Instrumentation for Pressure and Strain Measurements, Load Cells, Pressure Gauges, Pressure Reference Section, Pressure Switches, Pressure Transducers, Proximity Transducers, Regulators, Strain Gages, Torque Transducers, Valves

### • Heaters

Band Heaters, Cartridge Heaters, Circulation Heaters, Comfort Heaters, Controllers, Meters and Switching Devices, Flexible Heaters, General Test and Measurement Instruments, Heater Hook-up Wire, Heating Cable Systems, Immersion Heaters, Process Air and Duct, Heaters, Radiant Heaters, Strip Heaters, Tubular Heaters