

Wireless Benchtop Meter, Scanner and Controller

With Embedded Ethernet Connectivity



MDSwi8, \$545.

All models shown
smaller than actual size.

MDSwi8 Series

\$545

All Models



- ✓ Read 8 Wireless Sensors Simultaneously
- ✓ Portable, Rugged Metal Benchtop Enclosure with Tilt Handle
- ✓ Built Around OMEGA's New iSeries Meters
- ✓ User-Friendly, Simple to Configure
- ✓ Wireless Inputs: Thermocouple RTD Temperature
- ✓ Embedded Ethernet Standard

wiSeries

wiSeries Wireless Monitoring and Control System

The OMEGA® wiSeries wireless monitoring and control system features meters and scanners compatible with a large and growing number of OMEGA® wireless sensors:


UWTC "Universal Wireless Thermocouple"
Type J, K, T, E, R, S, B, N, and C.

UWRD "Universal Wireless RTD"

zSeries Wireless End Devices with sensors for temperature.



Works with
UWTC-NB9-CASS-18-U-12
wireless thermocouple/
transmitter assembly,
\$195, see page W-16.

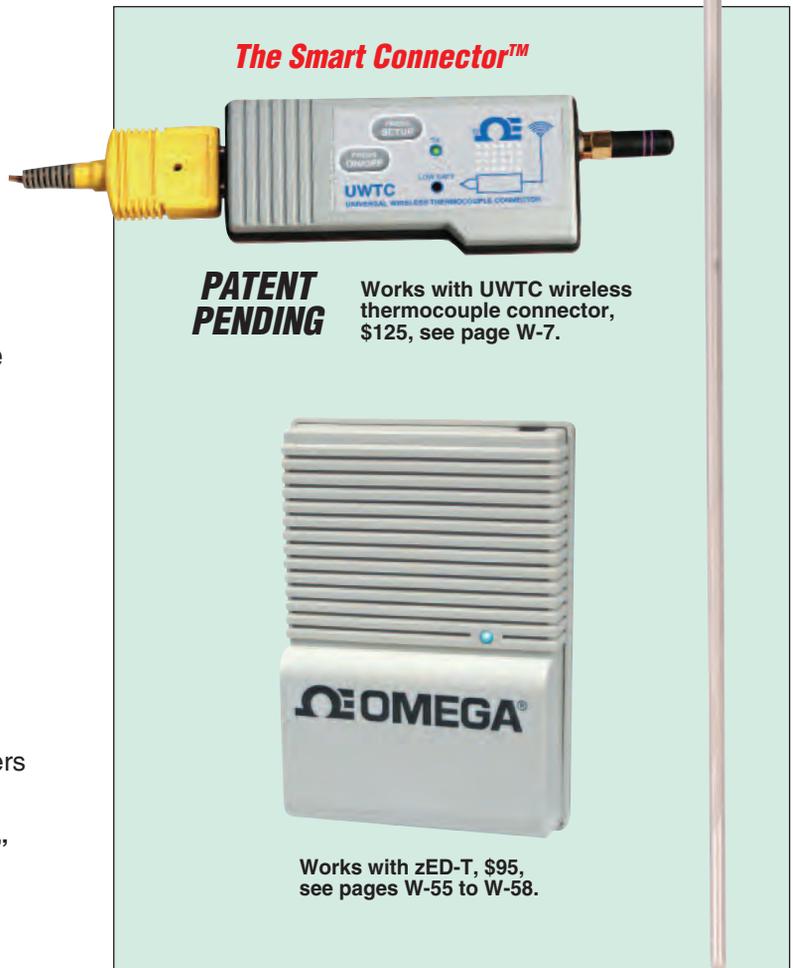


The Smart Connector™

**PATENT
PENDING**

Works with UWTC wireless
thermocouple connector,
\$125, see page W-7.

Works with zED-T, \$95,
see pages W-55 to W-58.

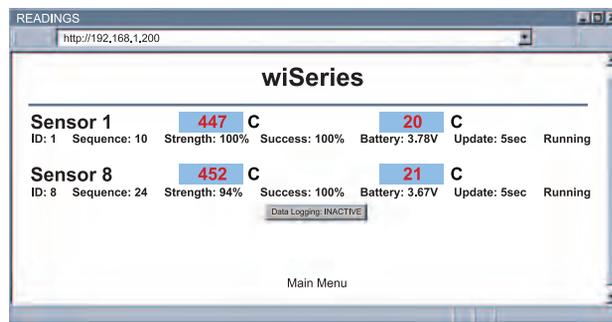

Temperature Readings of up to 8 Sensors

The wiSeries ½ DIN panel meter and controller can monitor up to 8 wireless sensors.

The compact instrument connects directly to an Ethernet network and the Internet and features OMEGA's award-winning embedded Web Server. It is easily configured and monitored with a Web browser over the Ethernet network or the Internet.

Alternatively, the wi8 meter-controller can instead be connected to the USB port of a single computer with a "USB Ethernet Adaptor" that are inexpensive and widely available.

Monitor and Alarm

The wi-8 meter-controller comes standard with a choice of either two Form C relays, or two SSRs (solid state relays) that can be used for control functions or alarms. The wi8 meter can monitor alarm conditions for any or all of the wireless sensors. For example, the wi-8 meter can be set up to trip an alarm if any one of the sensors indicated it was above or below a pre-set alarm point.

Monitor and Control Locally and Over the Internet

The OMEGA® wiSeries wireless monitoring and control system provides local monitoring and control, along with remote Web-based monitoring of temperature from thermocouples, RTDs, and semiconductor sensors.

The wireless sensors transmit up to 1000 m (3280') (without obstructions or interference) to a wiSeries monitor-controller connected directly to an Ethernet network and the Internet. The wireless system complies with IEEE 802.15.4 operating at 2.4 GHz.

Note: Distances for UWTC-1, UWRTD-1: up to 60 m (200'), UWTC-2, UWRTD-2: up to 120 m (400'), zED-x-P: up to 1000 m (3280'), zED-x: up to 90 m (300') all distances without obstructions or interference.

The OMEGA wiSeries system let's you monitor and record temperature over an Ethernet network or the Internet without any special software—just your Web Browser.

Wireless Sensors

OMEGA offers a wide and growing selection of wireless sensors for a variety of applications. Depending on application, the wireless sensors are powered by 2 "AA" batteries, a single lithium battery (approx "AA" size), 2 "D" cell batteries, or an external AC adaptor that operates on any voltage worldwide from 100 to 240 Vac.



batteries, a single lithium battery (approx "AA" size), 2 "D" cell batteries, or an external AC adaptor that operates on any voltage worldwide from 100 to 240 Vac.

Wireless sensors are available with external probes appropriate for an almost unlimited variety of industrial and commercial applications.

Ethernet

The wiSeries meter-controller-scanner is an independent node on the network sending and receiving data in standard TCP/IP packets. It is easily configured from a Web Browser and can be password protected. From within an Ethernet LAN or over the Internet, the user simply types the IP address (such as 192.168.1.200) or an easy to remember name (such as "Oven 5" or "Chicago Test Fixture") and the wiSeries meter serves a Web Page with the current readings.

Alarm and Email

The wiSeries meter can trigger an alarm if variables go above or below a set point that you determine. Your alarm can be sent by email to a single user or to a group distribution list, including text messages to cell phones and PDAs. The OMEGA "Mail Notifier" software is a free and easy program for this application.

The wiSeries meter-controllers operate on any AC voltage worldwide from 90 to 240 Vac and 50 to 60 Hz. The meter-controller connects directly to an Ethernet Network or the Internet. Unlike an RS232 or USB device, it does not require a host computer.

Embedded Webserver

The OMEGA wiSeries wireless sensor system is easy to install, simple to operate, and features OMEGA's award-winning iServer technology with an Embedded Web Server that requires no special software.

Charts and Graphs

The OMEGA wiSeries system serves Active Web Pages to display real time readings and charts of temperature. You can also log data in standard data formats for use in a spreadsheet or data acquisition program such as Excel or Visual Basic. OMEGA offers a free and easy to use program for logging data to Excel.

The virtual chart viewed on the web page is a JAVA™ Applet that records a chart over the LAN or Internet in real time. With the OMEGA wiSeries system there is no need to invest time and money learning a proprietary software program to log or chart the data.

Chart scales are fully adjustable on the fly. For example, the chart can display one minute, one hour, one day, one week, one month or one year. Temperature can be charted across the full span (-40 to 125°C), or within any narrow range such as (20 to 30°C).

A complete wireless system requires at least 1 benchtop receiver (wi8XX) and 1 end device (UWTC, UWRTD or zED).

OMEGA offers an OPC Server software (\$295) that makes it easy to integrate the wiSeries wireless sensor system with many popular Data Acquisition and Automation programs offered by OMEGA, Wonderware, iConics, Intellution, Rockwell Automation, and National Instruments, among others.



Programmable Color Display

The OMEGA wiSeries feature OMEGA’s patented programmable color displays. The display can be programmed to change color at any set point or alarm point

For example, the wiSeries can be programmed to display the process value in **GREEN** during warm-up, switching to **AMBER** to signal the normal operating range, and in **RED** to signal an alarm condition. The changes in color are quickly seen from a distance, and machine operators can intuitively react to changing conditions. The colors can be programmed

to change back when the value drops back below the alarm point or to "latch" on until being reset by the operator.

The wiSeries can also be programmed to display only one unchanging color: **GREEN**, **AMBER**, or **RED**. This is a useful way to let an operator identify, at a glance, process values in three separate locations, or to display three different measurements such as Temperature, Pressure, and Flow.

Quality and Technology

The innovative OMEGA wiSeries of meters and controllers features an extended 1 year warranty at no extra charge.

Specifications

Network and Communications

Ethernet: Standards Compliance IEEE 802.3 10 Base-T

Supported Protocols: TCP/IP, ARP, HTTPGET

Connection: Screw terminals

General

Display: 4-digit, 9-segment LED, 10.2 mm (0.40") and 21 mm (0.83"), red, green and amber programmable colors

Operating Temp: 0 to 55°C (32 to 131°F), 90% RH non-condensing

Line Voltage/Power: 90 to 240 Vac ±10%, 50 to 400 Hz*, 110 to 375 Vdc, equivalent voltage

* No CE compliance above 60 Hz

MOST POPULAR MODEL HIGHLIGHTED!

To Order (Specify Model Number)		
Model No.	Price	Description
MDSwi833-U	\$545	Wireless benchtop meter for UWTC/UWRTD models with 2 relays (form "C" SPDT 3 A @ 120 Vac, 3 A @ 240 Vac)
MDSwi853-U	545	Wireless benchtop meter for UWTC/UWRTD models with analog output (0 to 10 Vdc or 0 to 20 mA @ 500 Ω max) and form "C" relay
MDSwi822-U	545	Wireless benchtop Meter For UWTC/UWRTD models with two solid state relays (SSRs) (0.5 A @ 120/240 Vac continuous)
MDSwi833-ZT	545	Wireless benchtop meter for zSeries models with 2 relays: (form "C" SPDT 3 A @ 120 Vac, 3 A @ 240 Vac)
MDSwi853-ZT	545	Wireless benchtop meter for zSeries models with analog output (0 to 10 Vdc or 0 to 20 mA @ 500 Ω max) and form "C" relay
MDSwi822-ZT	545	Wireless benchtop meter with for zSeries models with two solid state relays (SSRs) (0.5 A @ 120/240 Vac continuous)

Accessories

Model No.	Price	Description
POWER CORD-DM	\$20	Power cord with connector for Denmark
POWER CORD-E-10A	20	Power cord with connector for Continental Europe
POWER CORD-IT	20	Power cord with connector for Italy or Ireland
POWER CORD-SE	7	Power cord with stripped ends (no connection), all countries 250 Vac max
POWER CORD-UK	35	Power cord with connector for United Kingdom
POWER CORD-MOLDED	7	Power cord with connector for North America (USA, Mexico, Canada), standard 120 Vac

Comes complete with operator's manual.

Order Example: MDSwi833-U wireless benchtop meter for UWTC/UWRTD sensors, \$545, with POWER CORD-MOLDED, power cord, \$7, \$545 + 7 = \$552.