DRA-RTM-8 16-Channel Analog Multiplexer






Model DRA-RTM-8





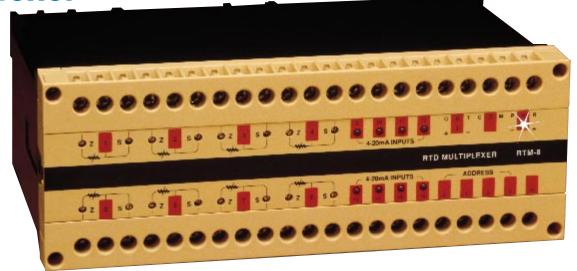

- ✓ Eight 3-Wire 100 Ohm **Platinum RTD Inputs**
- ✓ Eight 4-20 mA Process Inputs
- ✓ All 16 Inputs are Multiplexed into a Single 4-20 mA Output
- ✓ 100 Ohm Platinum **Linearization and Lead Length Compensation** for RTD Inputs

The DRA-RTM-8 is a 16 channel analog multiplexer. Eight channels accept 3-wire 100 Ohm Pt RTD inputs, and the other eight channels accept 4-20 mA process inputs. All 16 inputs are multiplexed into a single 4-20 mA current loop output. The selection function is performed via four binary control lines generated by the host controller (PLC program).

Model DRA-RTM-8 is an all solid state unit that multiplexes the input channels at a switching time of less than 20 microseconds. Each of the RTD inputs is completely signal conditioned including a 6 dip-switch array for coarse channel ranging as well as zero and span trimmers on the front panel for fine ranging. Special attention is given to the lead length compensation parameter because, unlike ordinary transmitters, the DRA-RTM-8 could be mounted relatively far from the RTD sensors. The 4-20 mA output

from the DRA-RTM-8 is linearized to the RTD input.

The DRA-RTM-8's superb accuracy and simple operation make it a very attractive unit allowing tremendous cost savings by reducing the need for expensive PLC or data acquisition analog inputs.

### **Specifications GENERAL**

Switching Time: < 20 microseconds (resistive load) Indicators: 8 red LEDs for current inputs, one yellow power on LED Supply Voltage: 24 Vdc ± 10% regulated

**Accuracy:** ±0.1% of span max

**Operating Current Consumption:**  $90 \text{ mA} \pm 10 \text{ mA}$ 

Temperature Stability: ±0.01% of span/1°C

Operating Ambient: 0 to 60°C (32 to 140°F), 5 to 95% RH noncondensing

Storage Temperature: -25 to 85°C (-13 to 185°F)

Enclosure: polycarbonate

Mounting: standard 35 mm DIN rail

or wall mount

**Weight:** 0.9 kg (2.0 lb)

**Dimensions:** 73 H x 200 W x 121 mm D (2.88" x 7.88" x 4.76")

#### **RTD INPUTS**

RTD Inputs: eight 3-wire 100  $\Omega$ Platinum, a = 0.00385

Current Excitation: < 1.1 mA **Zero:** -50 to 200°C (-58 to 392°F) **Span:** 50 to 750°C (122 to 1382°F) **Lead Compensation:**  $0.025^{\circ}$ C/10  $\Omega$ lead resistance max error

**Lead Resistance:** 60  $\Omega$  one way max

#### **PROCESS INPUTS**

Process Inputs: eight, 4-20 mA/ 0-20 mA

Input Current: 30 mA max

Reverse Polarity Protection: yes

#### CONTROL INPUTS

Digital Inputs: 4 address,

1 enable/self-test

**Logic:** true high or true low

(user selectable)

Digital Logic Levels: Vin "low" < 0.5V 5V < Vin "high" < 60 V

Analog Output: selected, 4-20 mA

current loop

| To Order (Specify Model Number) |       |                                                       |
|---------------------------------|-------|-------------------------------------------------------|
| Model No.                       | Price | Description                                           |
| DRA-RTM-8                       | \$900 | Analog multiplexer                                    |
| DRN-PS-1000                     | 150   | Power supply, 95-240 Vac input, 24 Vdc<br>@ 1A output |

Comes with complete operator's manual.

Ordering Example: DRA-RTM-8 analog multiplexer with DRN-PS-1000 power supply,  $$900 + \bar{1}50 = $1050$ 

Your One-Stop Source for Process Measurement and Control!

One Omega Drive | Stamford, CT 06907 | 1-888-TC-OMEGA (1-888-826-6342) | info@omega.com

### www.omega.com



#### **UNITED STATES**

www.omega.com 1-800-TC-OMEGA Stamford, CT.

#### **CANADA**

www.omega.ca Laval(Quebec) 1-800-TC-OMEGA

#### **GERMANY**

www.omega.de Deckenpfronn, Germany 0800-8266342

#### UNITED KINGDOM

www.omega.co.uk Manchester, England 0800-488-488

#### **FRANCE**

www.omega.fr Guyancourt, France 088-466-342

#### **CZECH REPUBLIC**

www.omegaeng.cz Karviná, Czech Republic 596-311-899

#### **BENELUX**

www.omega.nl Amstelveen, NL 0800-099-33-44



# More than 100,000 Products Available!

### Temperature

Calibrators, Connectors, General Test and Measurement Instruments, Glass Bulb Thermometers, Handheld Instruments for Temperature Measurement, Ice Point References, Indicating Labels, Crayons, Cements and Lacquers, Infrared Temperature Measurement Instruments, Recorders Relative Humidity Measurement Instruments, RTD Probes, Elements and Assemblies, Temperature & Process Meters, Timers and Counters, Temperature and Process Controllers and Power Switching Devices, Thermistor Elements, Probes and Assemblies, Thermocouples Thermowells and Head and Well Assemblies, Transmitters, Wire

#### Flow and Level

Air Velocity Indicators, Doppler Flowmeters, Level Measurement, Magnetic Flowmeters, Mass Flowmeters, Pitot Tubes, Pumps, Rotameters, Turbine and Paddle Wheel Flowmeters, Ultrasonic Flowmeters, Valves, Variable Area Flowmeters, Vortex Shedding Flowmeters

## pH and Conductivity

Conductivity Instrumentation, Dissolved Oxygen Instrumentation, Environmental Instrumentation, pH Electrodes and Instruments, Water and Soil Analysis Instrumentation

### Data Acquisition

Auto-Dialers and Alarm Monitoring Systems, Communication Products and Converters, Data Acquisition and Analysis Software, Data Loggers Plug-in Cards, Signal Conditioners, USB, RS232, RS485 and Parallel Port Data Acquisition Systems, Wireless Transmitters and Receivers

### • Pressure, Strain and Force

Displacement Transducers, Dynamic Measurement Force Sensors, Instrumentation for Pressure and Strain Measurements, Load Cells, Pressure Gauges, Pressure Reference Section, Pressure Switches, Pressure Transducers, Proximity Transducers, Regulators, Strain Gages, Torque Transducers, Valves

#### Heaters

Band Heaters, Cartridge Heaters, Circulation Heaters, Comfort Heaters, Controllers, Meters and Switching Devices, Flexible Heaters, General Test and Measurement Instruments, Heater Hook-up Wire, Heating Cable Systems, Immersion Heaters, Process Air and Duct, Heaters, Radiant Heaters, Strip Heaters, Tubular Heaters