

Ambient Temperature and Thermocouple Data Logger Part of the NOMAD® Family

OM-CP-TC101A



Optional

- ✓ Dual Channel/Ambient and Remote
- ✓ 10 Year Battery Life
- ✓ 1 Second Reading Rate
- ✓ Multiple Start/Stop Function
- ✓ Accepts Thermocouple Types J, K, T, E, R, S, B, N
- ✓ Ultra High Speed Download
- ✓ Memory: 1,000,000 Readings
- ✓ Memory Wrap Around
- ✓ Battery Life Indicator
- ✓ Programmable High and Low Alarms
- ✓ Multiple Start/Stop Function Storage Capacity

The OM-CP-TC101A is a state-of-the-art low-cost battery powered thermocouple data logger.

The OM-CP-TC101A offers a 10 year battery life, 1 second reading rate, a multiple start/stop function, ultra-high speed download capability, 1,000,000 reading storage capacity, optional memory wrap, battery life indicator, optional password protection, programmable high-low alarms and more.


Using the software, starting, stopping and downloading from the OM-CP-TC101A is simple and easy. Graphical, tabular and summary data is provided for analysis and data can be viewed in °C, °F, K or °R. The data can also be automatically exported to Excel® for further calculations.

The OM-CP-TC101A is a major leap forward in both size and performance. Its real time clock ensures that all data is time and date stamped.

The storage medium is non-volatile solid state memory, providing maximum data security even if the battery becomes discharged. Its small size allows it to fit almost anywhere.



OM-CP-TC101A shown with 5SC Series thermocouple (sold separately).

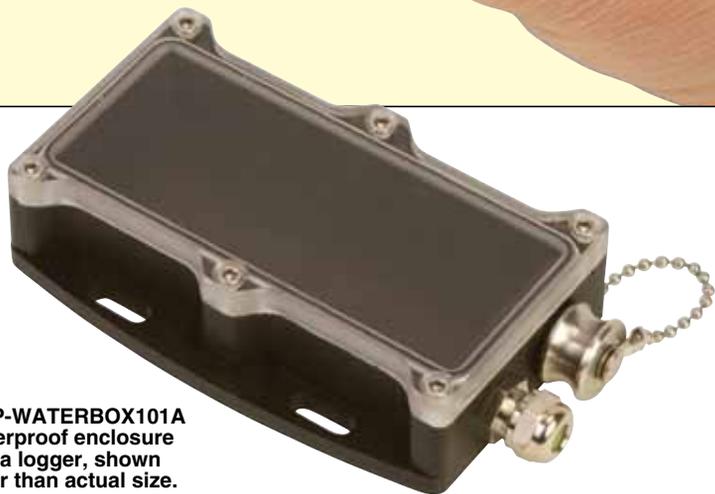

OM-CP-WATERBOX101A weatherproof enclosure for data logger, shown smaller than actual size.

Data retrieval is simple. Plug it into an available USB port and the easy to use Windows software does the rest. The software converts your PC into a real time strip chart recorder. Data can be printed in tabular format and can also be exported to a text or Microsoft Excel file.

The OM-CP-TC101A designed with our customers in mind. There are free firmware upgrades for the life of the product so that data loggers already deployed in the field can grow with new technological developments. Units do not need to be returned to the factory for upgrades. The user can do this automatically from any PC.

Thermocouple Type	Range (°C)	Resolution	Accuracy*
J	-210 to 760°C	0.1°C	±0.5°C
K	-270 to 1370°C	0.1°C	±0.5°C
T	-270 to 400°C	0.1°C	±0.5°C
E	-270 to 980°C	0.1°C	±0.5°C
R	-50 to 1760°C	0.5°C	±2.0°C
S	-50 to 1760°C	0.5°C	±2.0°C
B	-50 to 1820°C	0.5°C	±2.0°C
N	-270 to 1300°C	0.1°C	±0.5°C

* Thermocouple accuracy is specified with a 24 AWG wire.

Specifications

INTERNAL CHANNEL

Temperature Range:
-40 to 80°C (-40 to 176°F)

Temperature Resolution:
0.1°C (0.018°F)

Calibrated Accuracy:
±0.5°C (0.9°F)

REMOTE CHANNEL

Thermocouple Types:

J, K, T, E, R, S, B, N

Thermocouple Connection: Female subminiature (SMP) connector

Cold Junction Compensation: Automatic based on internal channel

Maximum Thermocouple Resistance: 100Ω

Reading Rate: 1 reading every second to 1 every 24 hours

Memory: 1,000,000 readings; software configurable memory wrap 500,000 readings in multiple start/stop mode or trigger settings mode

Memory Wrap Around: Yes (software configurable)

Start Modes:

- Immediate start
- Delay start up to 18 months
- Multiple pushbutton start/stop

Stop Modes:

- Manual through software
- Timed (specific date and time)


Multiple Start/Stop Mode: Start and stop the device multiple times without having to download data or communicate with a PC

Multiple Start/Stop Mode

Activation:

To Start the Device:

Press and hold the pushbutton for 5 seconds, the device has started logging

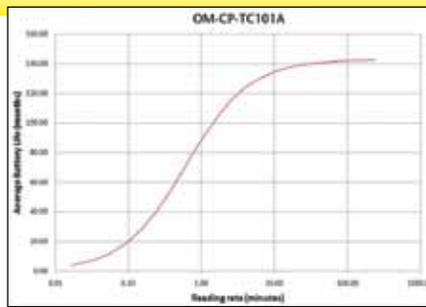

Average battery life vs. reading rate of the OM-CP-TC101A recording in a 25°C environment.

To Stop the Device:

Press and hold the pushbutton for 5 seconds while the device is logging, the device has stopped logging

Real Time Recording: The device may be used with PC to monitor and record data in real-time

Alarm: Programmable high and low limits; alarm is activated when temperature reaches or exceeds set limits

Alarm Delay: A cumulative alarm delay may be set in which the device will activate that alarm (via LED) only when the device has recorded a user specified time duration of data

Trigger Settings: High and low limits may be set for the thermocouple channel. Once data meets or exceeds sets limits, the device will record to memory. Bi-level start and stop triggers can also be programmed. Users can specify the number or readings to take after the device triggers.

LED Functionality:

Green LED Blinks: 10 second rate to indicate logging; 15 second rate to indicate delay start mode

Red LED Blinks: 10 second rate to indicate low battery and/or full memory; 1 second rate to indicate an alarm condition



OM-CP-IFC200, Windows software displays data in graphical or tabular format

Password Protection: An optional password may be programmed into the device to restrict access to configuration options. Data may be read out without the password

Battery Type: 3.6V lithium battery (included); user replaceable

Battery Life: 10 years typical at a 15 minute reading rate

Data Format: Date and time stamped °C, °F, K, °R, μV, mV, V

Time Accuracy: ±1 minute/month at 20°C (68°F) stand alone data logging

Computer Interface: USB (interface cable required); 115,200 baud

Software: Windows® XP SP3/ Vista/7 and 8 (32-bit and 64-bit)

Operating Environment: -40 to 80°C (-40 to 176°F), 0 to 95% RH non-condensing

Dimensions

Data Logger:

36 L x 56 W x 16 mm D (1.4 x 2.2 x 0.6")

Waterbox Enclosure:

74 H x 148 W x 39 mm D (2.9 x 5.8 x 1.5")

Weight: 24 g (0.9 oz)

Materials

Data Logger: ABS plastic

Waterbox Enclosure: Black anodized aluminum

To Order

Model No.	Description
OM-CP-TC101A	Ambient temperature and thermocouple data logger
OM-CP-TC101A-CERT	Ambient temperature and thermocouple data logger and NIST calibration certificate
OM-CP-IFC200	Windows software and 1.8 m (6') USB interface cable
OM-CP-SVP-SYSTEM	FDA 21 CFR part 11 compliant IQ/OQ/PQ secure software validation workbook and software package (unlimited users, license per computer)
OM-CP-BAT105	Replacement 3.6V lithium battery
OM-CP-WATERBOX101A	Weatherproof NEMA 4 (IP65) enclosure for data logger
OM-CP-WATERBOX101A-KIT	Maintenance kit for OM-CP-WATERBOX101A

Comes complete with 3.6V lithium battery. Operator's manual and USB cable are included with the OM-CP-IFC200 Windows software (required to operate the data logger and sold separately).

Ordering Example: OM-CP-TC101A-CERT, ambient temperature and thermocouple data logger with NIST calibration certificate and OM-CP-IFC200, Windows software.